



Max Machinery Inc.


Call Max today...
(707) 433-7281

Model 213 Piston Meter

SPECIFICATIONS

- **Flow Range (at 3 cps):** 1 to 1800 cc/min (0.48 gpm)
- **Maximum operating pressure:**
70 bar (1000 psi) - standard
210 bar (3000 psi) - optional
- **Displacement:** 0.887 cc/rev (0.05 in³/rev)
- **Weight:** 0.6 kg (1.25 lbs.)
- **Recommended Filtration:** 10 micron (1250 mesh)
- **Port Size:** 1/8" NPT - standard, #4 SAE - optional
- **Fluids:** Most non-aqueous, organic liquids
- **Heat Trace:** Fluid ports or electric heater - optional
- [Go to Linearity curve](#)
- [Go to Viscosity / Pressure drop curve](#)


- [Go to Output Signal choices \(Transmitters\)](#)

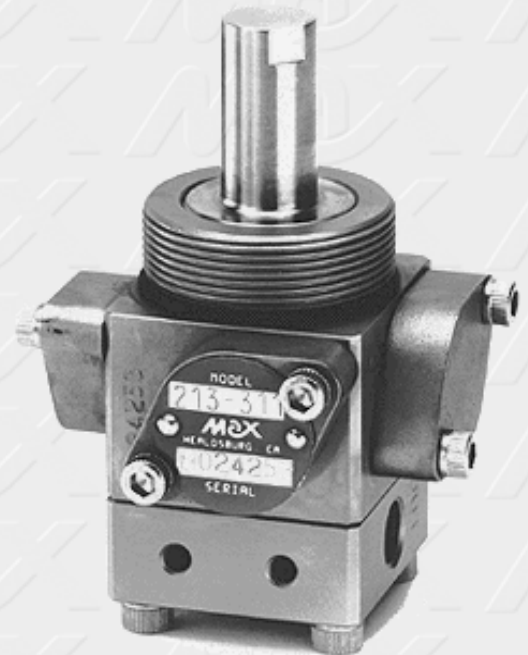

MATERIALS OF CONSTRUCTION

- **Body:** Stainless steel, type 303
- **Pistons:** Stainless steel, type 303
- **Crankshaft:** Stainless steel, type 303
- **Bearings:** Stainless steel, type 440C
- **Seals:** Viton® "O" - rings - standard
Teflon®, Neoprene, Nordel®, Buna N seals - optional

PHYSICAL DIMENSIONS

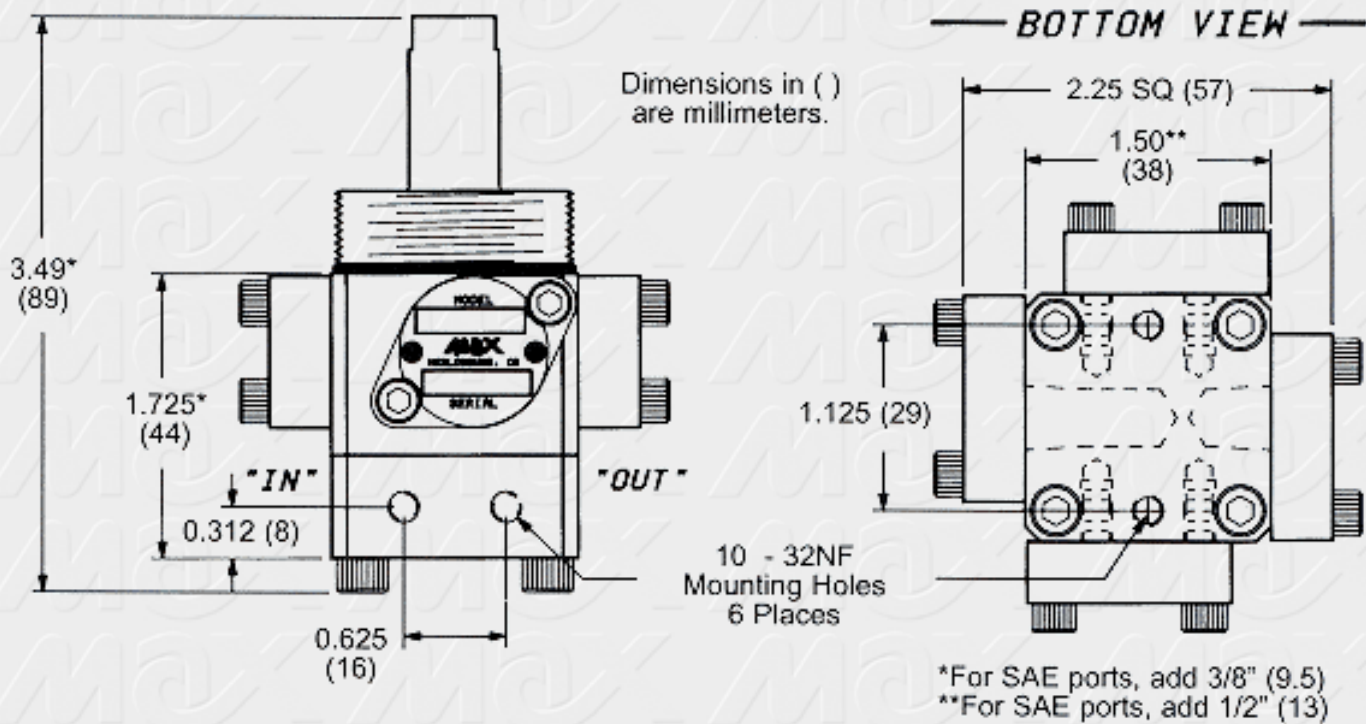

Max Machinery, Inc., 1420 Healdsburg Ave., Healdsburg, CA 95448 USA
Phone: (707) 433-7281 Fax: (707) 433-0571

All pages and graphics Copyright© 1998 Max Machinery Inc.
Nordel® and Viton® are registered trademarks of DuPont Dow Elastomers.
Teflon® is a registered trademark of DuPont.