




Max Machinery Inc.

Call Max today...
(707) 433-7281

Model 216 Piston Meter


SPECIFICATIONS

- **Flow range at (3 cps):**
0.1 to 100 liters/min (26 gpm)
- **Maximum Operating Pressure:**
70 bar (1000 psi) - standard
210 bar (3000 psi) - optional
- **Displacement:** 169.5 cc/rev (10.33 in³/rev)
- **Weight:** 25kg (55 lbs)
- **Recommended Filtration:** 10 micron (1250 mesh)
- **Port Size:** ¾" NPT - standard, #12 SAE - optional
- **Fluids:** Most nonaqueous, organic liquids
- **Heat Trace:** Fluid Ports - optional
- [Go to Linearity Curve](#)
- [Go to Viscosity / Pressure drop curve](#)
- [Go to Output Signal choices \(Transmitters\)](#)

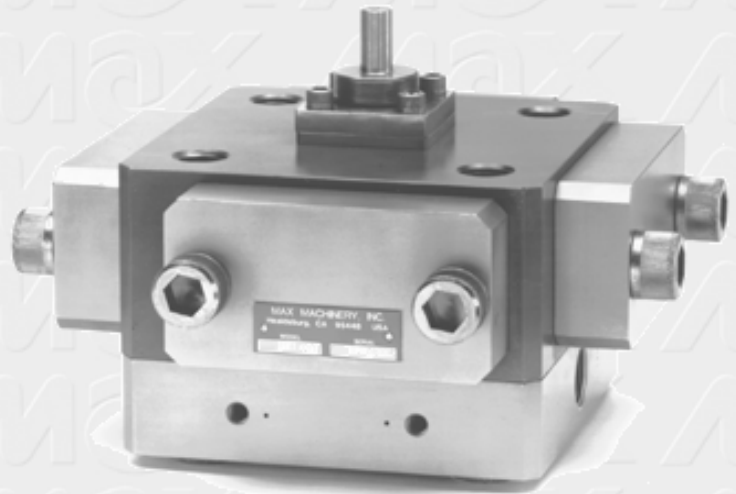

MATERIALS OF CONSTRUCTION

- **Body:** Stainless Steel, type 303
- **Pistons:** Stainless Steel, type 303
- **Crankshaft:** Stainless Steel, type 303
- **Bearings:** Stainless steel, type 440C
- **Seals:** Viton® "O"- rings - Standard
Teflon®, Neoprene, Nordel®, Buna N Seals - optional

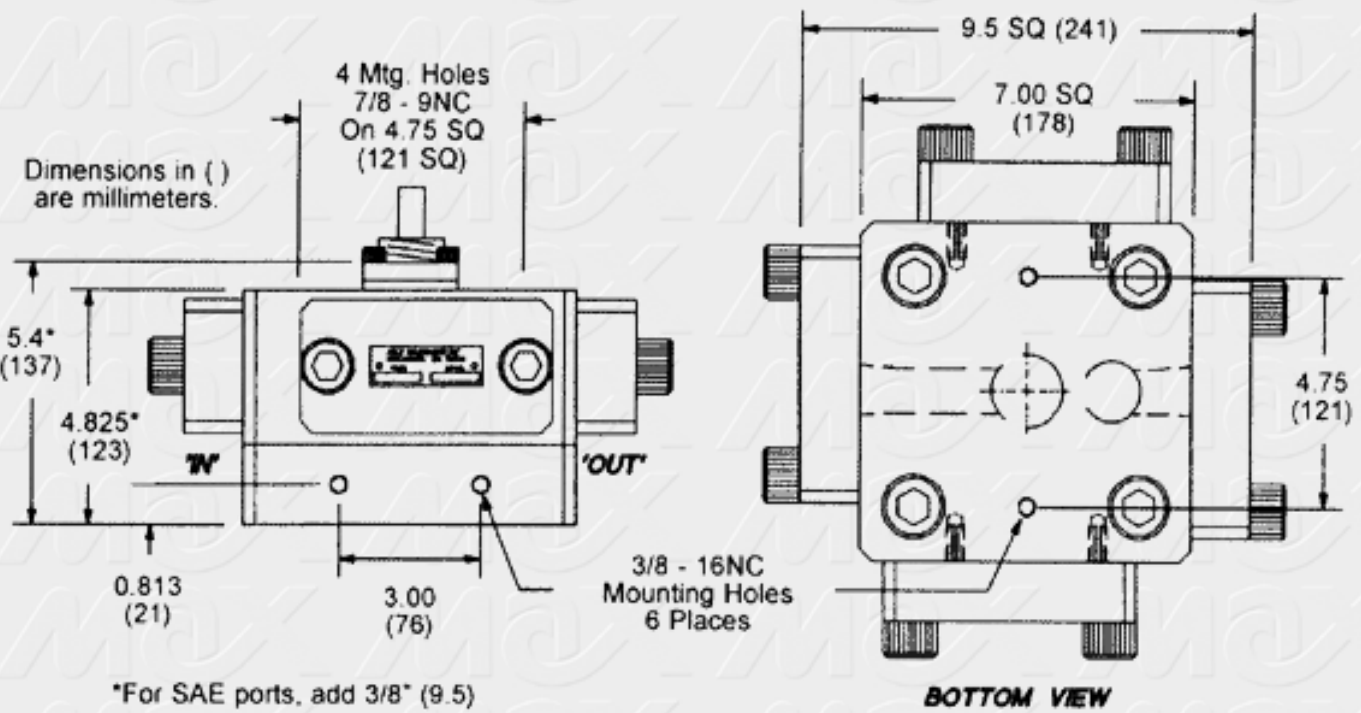PHYSICAL DIMENSIONS

Max Machinery Inc., 1420 Healdsburg Ave., Healdsburg, CA 95448 USA

Phone: (707) 433-7281 Fax: (707) 433-0571

All pages and graphics Copyright© 1998 Max Machinery Inc.

Nordel® and Viton® are registered trademarks of DuPont Dow Elastomers.

Teflon® is a registered trademark of DuPont.