



CustomControlSensors

# Hazardous Areas Adjustable Pressure Switch

## 673DE\* - Diaphragm Sensor

### DESCRIPTION

- Highly reliable devices utilizing the CCS Dual-Snap® Belleville disc spring principle pioneered by CCS' engineers.
- Engineering based on aerospace technology.
- Rigid, midsize and internally adjustable for convenient field set point adjustment.
- Repeatable and stable set points.
- Vibration and shock resistant.
- High cycle life.
- High over-pressure capability. (System and Proof)

### SERIES:

673DE\*

### ADJUSTABLE SET POINT RANGE:

#### DIFFERENTIAL PRESSURE:

2 to 60 PSID  
0.14 to 4.14 bar  
13.79 to 414 kPa

### OPERATING TEMPERATURE:

Temperature limits change with o-ring selection.

-40° to 186°F  
-40° to 86°C

### STANDARD FEATURES:

- Hermetically Sealed Electrical Assembly
- CE Mark
- CRN
- NEMA: 4, 4X, 7, 9, 13 / IP67
- U.L. / CSA Listed





- Certified explosion proof hermetically sealed electrical assembly for environmental protection.
- Various options for wetted materials and electrical ratings to meet a wide range of application requirements and media capability.

SHIPPING WEIGHT: APPROXIMATELY 67 OUNCES (1899 GRAMS)

### INSTALLATION DRAWING

### DESIGN PRINCIPLES

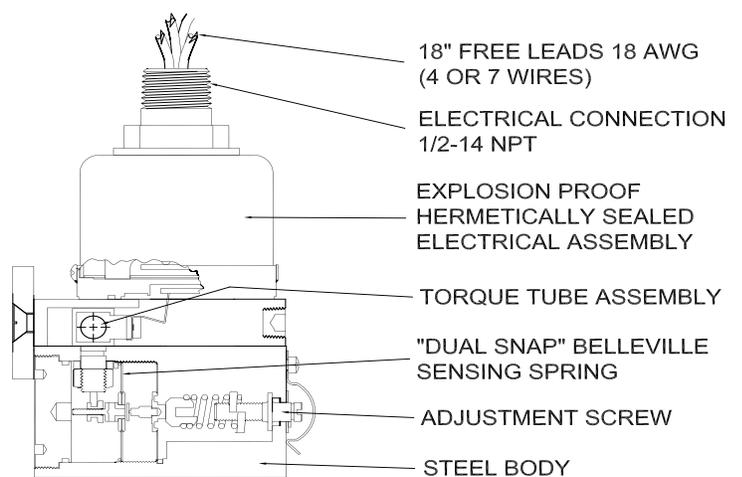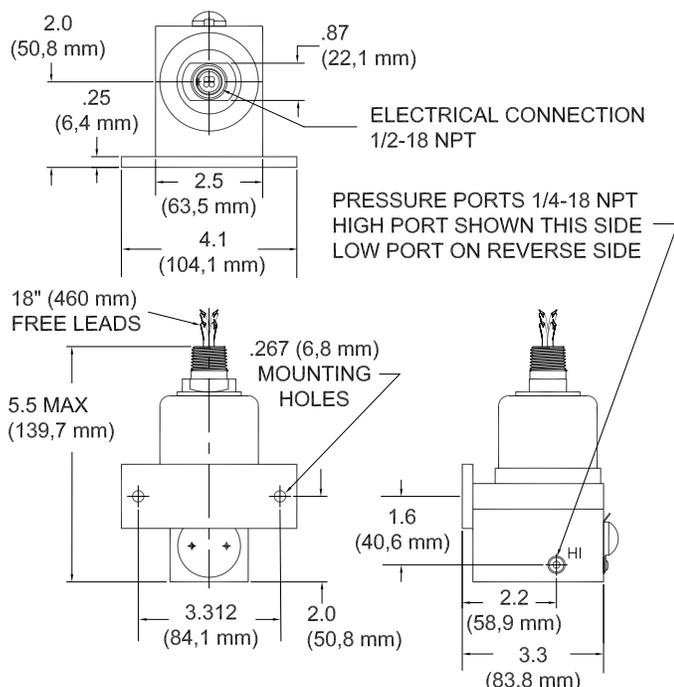

### SERIES 673 DE

**FIELD SETTING:** Loosen access cover. Adjust screwdriver adjustment slot. Clockwise to decrease settings. Counterclockwise to increase settings.

**NOTE:** DO NOT USE ELECTRICAL HEX FOR TORQUING.



CustomControlSensors

# Hazardous Areas Adjustable Pressure Switch

## 673DE\* - Diaphragm Sensor

### OPERATING AND ORDERING DATA

SERIES 673DE*	WETTED PARTS: 1/4"-14 NPT 300 STAINLESS STEEL PRESSURE PORT & DIAPHRAGM, VITON O-RING						
	ADJUSTABLE SET POINT RANGE		APPROX. DEAD BAND PSI (BAR)	MAX SYSTEM PRESSURE PSIG (BAR)	PROOF PRESSURE PSIG (BAR)		
	INCREASING PRESSURE PSID (BAR)	DECREASING PRESSURE PSID (BAR)			BOTH PORTS SIMULT.	HIGH OVER LOW LOW OVER HIGH	
			HIGH	LOW			
673DE*8011	7-60 (0.483-4.14)	2-55 (0.14-3.79)	5 (0.345)	3000 (207)	4500 (310)	2000 (138)	1000 (68.9)
673DEM*8011	9-60 (0.62-4.14)	2-55 (0.14-3.79)	7 (0.482)				

### HOW TO ORDER

Follow these steps to build your part number:

1. Specify the series based on your required set point, range, dead band, system pressure and proof pressure.
2. Add desired options model code letter.
3. Add the applicable standard suffix number.

(Ex: 673DEM8011-7076)

### PRESSURE CONVERSION

1 BAR = 14.5 PSI  
1 kPa = 0.145 PSI

### OPTIONAL STANDARD MODIFIED SUFFIXES

- 7008:** Gold Contacts
- 7054:** 2 Meter Free Leads
- 7076:** 18 inch Teflon Free Leads (Low Temp Wire)

### OPTIONS MODEL CODES

- F:** Ethylene Propylene O-Ring
- M:** DPDT Electrical

### CERTIFICATIONS

Consult CCS website for complete certification and approval listing.

### ELECTRICAL ENCLOSURE CERTIFICATIONS

\* c-UL, U.L./CSA Explosion Proof: Div. 1, 2 hermetically sealed electrical assembly P/N 17-51 (17-73 for M model option), listed by both Underwriter's Laboratories, Inc. (File No. E32961) and Canadian Standard Association (CSA) Testing Laboratories (File No. LR22921) for hazardous locations, Class 1, Groups A, B, C, and D; Class 2 Groups E, F, and G.

*Note: Additional modified standard suffixes are available, consult CCS sales department or CCS Representative.*

### ELECTRICAL CHARACTERISTICS SCHEMATIC AND WIRING CODE

RATING OF SWITCH ELEMENT

VOLTS	AMPERES	
	SPDT Res.	DPDT "M" Res.
125 AC - 50/60 Hz	15	5
250 AC - 50/60 Hz	15	5
480 AC - 50/60 Hz	15	-
28 DC	-	5
125 DC	.5	.5
250 DC	.2	-
*125 AC - 50/60 Hz	1 max	1 max
*30 DC	1 max	1 max

\*Gold Contacts -7008 Suffix

