

MicroTrak™ 101

Technical Data Sheet

Ultra Low Flow High Performance Digital Gas Mass Flow Meters and Controllers

Features

- Measure and Control Flow of Gas from 4 sccm (smlm) down to 0.1 sccm (smlm)
- Digital performance
- Includes Dial-A-Gas® multi-gas capability that enables use with 10 different gases
- Unique Pilot Module interface (local or remote) allows control and display of the following functions:
 - Gas
 - Setpoint value
 - Setpoint source
 - Engineering units
 - Output signal
 - Valve state
 - Full Scale value
- All control functions are also available from your PC or workstation
- 316 stainless steel construction suitable for any clean gas, even corrosives and toxics
- Small footprint makes installation easy
- Single-sided power input reduces installation cost and complexity
- Every Micro-Trak Instrument includes:
 - RS-232 Communication
 - Analog communication
 - Software for Windows OS
 - Source code
 - Calibration certificate
 - Electrical Connector or Cable



Description

Micro-Trak™ measures and controls micro mass flows of gas previously thought to be too low for a reliable reading. Micro-Trak™ is specifically designed for flow ranges under 4 sccm (smlm) with a minimum controllable mass flow rate of 0.1 sccm (smlm).

The Model 101 is a specialized and highly engineered instrument for those who need accurate and reliable micro mass flow control of clean gases including corrosives and toxics. Micro-Trak™ is based on Sierra's award-winning family of digital instruments. As a result, ease of operation, field configuration, multi-gas capability and application flexibility are standard features.



SIERRA
EXPERIENCE OUR PASSION FOR FLOW!

The content contained herein is subject to change without notice.
For the most up to date information visit, www.sierrainstruments.com/downloads

www.sierrainstruments.com

Performance Specifications

Accuracy

+/- 1% of Full Scale including linearity at operating conditions

Dial-A-Gas

+/- 1% of Full Scale in all 10 standard gases

Repeatability

+/- 0.2% of Full Scale

Temperature Coefficient

+/- 0.025% of Full Scale per °F (0.05% of Full Scale per °C), or better

Pressure Coefficient

+/- 0.01% of Full Scale per psi (0.15% of Full Scale per bar), or better

Response Time

Governed by total volume of installation. Contact Sierra for suggestions on optimized installation.

Operating Specifications

Gases

All clean gases including corrosives & toxics; specify when ordering. The following ten gases make up the Dial-A-Gas® feature of every Micro-Trak™ instrument; up to nine alternate gases may be substituted.

DIAL-A-GAS RATES	
Gas	Micro-Trak Flow Range (sccm)
Air	0.10 to 4.0
Argon	0.14 to 5.6
CO ₂	0.074 to 2.95
CO	0.10 to 4.0
Methane	0.075 to 3.0
Helium	0.14 to 5.6
Hydrogen	0.10 to 4.0
Oxygen	0.10 to 4.0
Nitrogen	0.10 to 4.0
N ₂ O	0.072 to 2.9



Flow ranges specified are for an equivalent flow of nitrogen at 760 mm Hg and 21°C (70°F); other ranges in other units are available (e.g., nlpm, scfh, m³/h, kg/h)

Gas Pressure

500 psig (34.5 barg) maximum, burst tested to 750 psig (52 barg)

Pressure Drop Across a Meter

0.36 psi (24.5 mbar)

Differential Pressure Requirement For Controllers

30 psi (2040 mbar) optimum

1 psi (68 mbar) minimum at 21°C with outlet at ambient pressure

Gas & Ambient Temperature

32°F to 122°F (0°C to 50°C)

Leak Integrity

5 X 10⁻⁹ standard cc/sec of helium maximum

Operating Specifications (Continued)

Power Requirements

(Ripple noise not to exceed 100mV peak-to-peak)
For Mass Flow Meters: 15 to 24 VDC +/- 10% (130 mA maximum)
For Mass Flow Controllers: 24 VDC +/- 10% (400 mA, regulated) for C101

Control Range For Controllers

2–100% of Full Scale flow; automatic shut-off at 1.9%

Output Signal

Analog:

Linear 4 to 20 mA, 500 ohms maximum loop resistance and one of the following: Linear 0 to 5 VDC, 0 to 10 VDC, 1 to 5 VDC, 1000 ohms minimum load resistance

Digital:

RS-232; Pilot Module Display optional

Command Signal

Analog (choice of one):

Linear 4 to 20 mA, 0 to 5 VDC, 0 to 10 VDC, 1 to 5 VDC

Digital:

RS-232; Pilot Module Display optional


Wetted Material

316 stainless steel, 416 stainless steel; synthetic ruby, Viton® "O"-rings and valve seat standard; other elastomers are available (consult factory)


Physical Dimensions

All dimensions are in inches with mm in brackets. Certified drawings are available on request.

101 Micro-Trak™ Front View

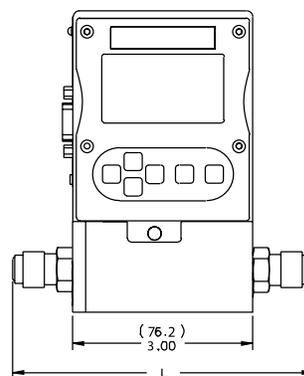


101 Micro-Trak™ Inlet View

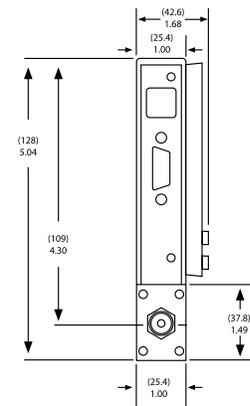

L dimension ranges from 4.6" [117] to 5.2" [132] depending on fittings used.

101 Micro-Trak™ Bottom View

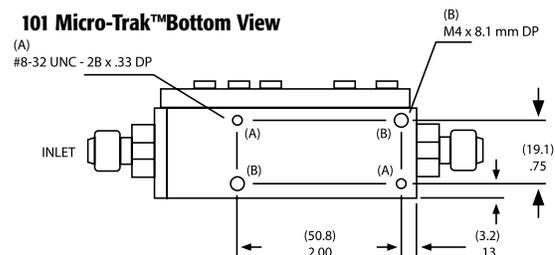

Ordering the Micro-Trak™

PARENT NUMBER M101 Micro-Trak™ Mass Flow Meter C101 Micro-Trak™ Mass Flow Controller											
PILOT MODULE DISPLAY/INTERFACE NR No Display/Interface DD Pilot Module Display/Interface RD Remote Pilot Module Display/Interface											
INLET/OUTLET FITTINGS 1 1/8 compression (STD) 2 1/4 compression 5 1/4 VCO 8 1/4 VCR 10 6 mm compression											
FLOW BODY ELASTOMERS OV1 Viton or equivalent ON1 Neoprene or equivalent											
VALVE SEAT (C101 Flow Controllers Only) SV1 Viton® or equivalent SN1 Neoprene or equivalent SK1 Kalrez® or equivalent											
INPUT POWER PV1M 12 to 15 VDC, Linear (Flow Meters Only) PV2 24 VDC, Linear (Standard)											
OUTPUT SIGNAL V1 4 to 20 mA and 0 to 5 VDC, Linear V2 4 to 20 mA and 1 to 5 VDC, Linear V3 4 to 20 mA and 0 to 10 VDC, Linear											
EXTERNAL SETPOINT SIGNAL (Flow Controllers Only) S0 Pilot Module/RS-232 (Standard for DD, RD) S1 0 to 5 VDC (Standard for NR) S2 1 to 5 VDC S3 0 to 10 VDC S4 4 to 20 mA											
ELECTRICAL CONNECTION C0 15 Pin Mating Connector with No Cable (Standard) C1 6-inch (150 mm) Communications Cable C3 3-foot (1 m) Communications Cable C10 10-foot (3 m) Communications Cable C () Custom Length Communication Cable											
OPTIONS GS Gas Substitution (Replace up to 9 Dial-A-Gas® Gases)											
GAS FLOW RATE											

FOR ACCESSORIES AND ADDITIONAL CABLES CONSULT SALESPERSON



www.sierrainstruments.com/micro



Micro-Trak™ & Dial-A Gas® are trademarks of Sierra Instruments, Inc. Nylon, Viton, Neoprene, Kalrez are registered trademarks of DuPont®, Windows® is a registered trademark of Microsoft

SIERRA INSTRUMENTS, NORTH AMERICA • 5 Harris Court, Building L • Monterey, California • (800) 866-0200 • (831) 373-0200 • Fax (831) 373-4402 • www.sierrainstruments.com

SIERRA INSTRUMENTS, EUROPE • Bijlmansweid 2 • 1934RE Egmond aan den Hoef • The Netherlands • +31 72 5071400 • Fax: +31 72 5071401

SIERRA INSTRUMENTS, ASIA • Rm.618, Tomson Centre, Bldg. A • 188 Zhang Yang Road • Pu Dong New District • Shanghai, P.R. China 200122 • +8621 5879 8521/22 • Fax: +8621 5879 8586